

08/29/00  
JC885 U.S. PTO

08-30-00  
A  
IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE

JC893 U.S. PTO  
09/650056  
08/29/00

**PATENT APPLICATION**

Santosh P Abraham  
Mooi Choo Chuah

**CASE** 2-48

**TITLE** A Load Balancing Technique for a Wireless Internet Access System

**ASSISTANT COMMISSIONER FOR PATENTS**  
**WASHINGTON, D.C. 20231**

**SIR:**

**NEW APPLICATION UNDER 37 CFR § 1.53(b)**

Enclosed are the following papers relating to the above-named application for patent:

Specification  
6 Formal Sheets of drawing(s)  
1 Assignment(s) with Cover Sheet  
Declaration and Power of Attorney


| CLAIMS AS FILED                             |           |           |                  |              |
|---|-----------|-----------|------------------|--------------|
|   | NO. FILED | NO. EXTRA | RATE             | CALCULATIONS |
| Total Claims                                | 9 - 20 =  | 0         | x \$18 =         | \$0          |
| Independent Claims                          | 6 - 3 =   | 3         | x \$78 =         | \$234        |
| Multiple Dependent<br>Claims, if applicable |           |           | + \$260 =        | \$0          |
| Basic Fee                                   |           |           |                  | \$690        |
|   |           |           | <b>TOTAL FEE</b> | <b>\$924</b> |

Please file the application and charge **Lucent Technologies Deposit Account No. 12-2325** the amount of \$924, to cover the filing fee. Duplicate copies of this letter are enclosed. In the event of non-payment or improper payment of a required fee, the Commissioner is authorized to charge or to credit **Deposit Account No. 12-2325** as required to correct the error.

The Assistant Commissioner for Patents is hereby authorized to treat any concurrent or future reply, requiring a petition for extension of time under 37 CFR § 1.136 for its timely submission, as incorporating a petition for extension of time for the appropriate length of time if not submitted with the reply.

Please address all correspondence to **Docket Administrator (Room 3C-512), Lucent Technologies Inc., 600 Mountain Avenue, P.O. Box 636, Murray Hill, New Jersey 07974-0636**. However, telephone calls should be made to me at 732-949-1708.

Respectfully,


  
Joseph J Opalach  
Reg. No. 36229  
Attorney for Applicant(s)

**Date:** August 29, 2000  
**Lucent Technologies Inc.**  
**600 Mountain Avenue (Room 3C-512)**  
**P.O. Box 636**  
**Murray Hill, New Jersey 07974-0636**

"Express Mail" mailing label  
number EJ049981768 US  
Date of Deposit 8/29/00  
I hereby certify that this application  
being deposited with the United States Postal  
Service "Express Mail Post Office to  
Addressee" service under 37 CFR 1.10 on the  
date indicated above and is addressed to the  
Commissioner of Patents and Trademarks,  
Washington, D.C. 20231.



(Printed name of person mailing paper of fee)



(Signature of person mailing paper or fee)

## A LOAD BALANCING TECHNIQUE FOR A WIRELESS INTERNET ACCESS SYSTEM

### CROSS-REFERENCE TO RELATED APPLICATIONS

5 This application claims the benefit of U.S. Provisional Application No. 60/198389,  
filed April 19, 2000. Related subject matter is disclosed in the co-pending, commonly  
assigned, U.S. Patent application of Abraham et al., entitled "Guaranteeing Types of  
Service in a Packet-Based System," Application No. 09/500390, filed on February 8,  
2000.

### FIELD OF THE INVENTION

10 This invention relates generally to communications and, more particularly, to  
packet communications systems.

### BACKGROUND OF THE INVENTION

Access to the Internet is now occurring via the wireless domain. For example, it is  
now possible to purchase small hand-held devices such as the Palm VII™, which provide  
15 access to the Internet via a wireless connection to a service provider. Further, at least one  
equipment manufacturer is advertising a wireless Internet access system (i.e., the Wireless  
Internet Access System from Lucent Technologies Inc.). In such an environment  
equipment manufacturers and service providers are becoming concerned about "Quality-  
of-Service" (QoS) issues in providing such service to their customers. Some examples of  
20 QoS issues are guarantees on, e.g., bit rate, delay and packet loss.

### SUMMARY OF THE INVENTION

One form of wireless internet access system utilizes a half-duplex communications  
link between a group of wireless modems and an access point of a base station  
(notwithstanding the fact that the access point is capable of full-duplex operation). We  
25 have observed that in such a wireless internet access system situations can occur causing  
low bandwidth utilization of the downlink channel of the half-duplex communications link  
– thus affecting QoS. Therefore, and in accordance with the principles of the invention,

load balancing is performed on the downlink channel.

In an embodiment of the invention, an access point of a base station and a group of wireless modems communicate over a wireless channel. This wireless channel comprises a sequence of “dwells,” where each dwell represents a period of time, e.g., 20 milli-seconds (ms). Each dwell can convey both uplink (or upstream) and downlink (or downstream) transmissions to, and from, the group of wireless modems. However, in each dwell a particular wireless modem can only communicate half-duplex – either provide an uplink transmission to the access point, or receive a downlink transmission from the access point. The access point load balances, or distributes, the downlink transmissions to the group of wireless modems across the dwells upon detection that some dwells convey more downlink transmissions than other dwells.

## BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 shows a portion of a wireless internet access network embodying the principles of the invention;

FIG. 2 illustrates a sequence of dwells;

FIG. 3 shows an illustrative downlink scheduler in accordance with the principles of the invention;

FIG. 4 conceptually illustrates load imbalance;

FIG. 5 shows a flowchart in accordance with the principles of the invention; and

FIG. 6 shows an illustrative high-level block diagram of an access point comprising a downlink scheduler.

## DETAILED DESCRIPTION

A portion of an illustrative wireless internet access system embodying the inventive concept is shown in FIG. 1. (Other than the inventive concept, an example of a wireless internet access system as illustrated in FIG. 1 is the Wireless Internet Access System from Lucent Technologies Inc.) Portion 300 comprises a number of base stations such as base station 315, which is an example of a wireless point-of-presence (POP) server that provides L2TP (Layer 2 Tunneling Protocol) access control (LAC). Each base station comprises a wireless hub (WH) that serves an area through a plurality of access points

(e.g., AP<sub>1</sub>, AP<sub>2</sub>, AP<sub>3</sub> and AP<sub>4</sub> of base station 315). Each access point includes a radio access controller as known in the art for communicating with a plurality of wireless modems as represented by wireless modems 310-1 through 310-N (each wireless modem is associated with a wireless subscriber as represented by user personal computer (PC) 305-1 through user PC 305-N). (It should be noted that each PC is representative of data terminal equipment (DTE) as known in the art.) Each wireless modem communicates with a respective base station via an uplink channel (as represented by line 311) and a downlink channel (as represented by line 312). A wireless modem and/or user PC represents a wireless endpoint, or device, which may, or may not, be mobile. Each base station is coupled to a private IP network through frame relay over T1/E1 facilities. The wireless internet access network is coupled to the public IP network through a data switching center (DSC) 330 to a router firewall 335, as known in the art, for communicating with Internet Service Providers (ISPs) or Corporate Intranets using L2TP, UDP/IP (User Datagram Protocol/Internet Protocol), etc.

It is assumed that the wireless internet access system illustrated by FIG. 1 utilizes a full-duplex MAC (media access control layer) between the base stations and the wireless endpoints. The MAC has a raw bandwidth of 1.2 Mbps (millions of bits per second). Every active wireless modem associates with one access point. While an access point is capable of operating in full duplex mode, the wireless modems operate in a half-duplex mode. As such, the maximum downlink bandwidth available for a wireless modem is half the available airlink bandwidth. In this system, each access point polls their associated wireless modems for uplink transmissions. For example, in the context of FIG. 1, AP<sub>1</sub> polls the set of wireless modems 310-1 through 310-N for any uplink transmissions (polling techniques are known in the art and not described herein).

Although shown as separate downlink and uplink channels (e.g., 311 and 312) for each wireless modem, communication between a group of wireless modems, e.g., 310-1 through 310-N, and an access point, e.g., AP<sub>1</sub>, takes place in a sequence of dwells, or time slots, as illustrated in FIG. 2. The sequence of dwells can be further characterized as “odd dwells,” e.g., dwells 1 and 3 of FIG. 2, and “even dwells,” e.g., dwell 2 of FIG. 2. Each dwell lasts for 20 milli-seconds (ms). A beacon (B) cell initiates the start of every dwell

and is broadcast by the access point. When an access point broadcasts a beacon, all wireless modems are in a receive mode. The beacon (e.g., see beacon 5 of FIG. 2) comprises a sync message (sync), uplink polls (UP) and transmit polls (TP). The sync message enables synchronization between a wireless modem and a corresponding access point. An uplink poll is used by the access point to specify to a particular wireless modem at what point in the dwell to start transmitting data to the access point and for how long the wireless modem can transmit. A transmit poll is used by the access point to specify to a particular wireless modem at what point in the dwell to start receiving data from the access point. Since transmission for each wireless modem is half duplex, each wireless modem can only transmit or receive in a particular dwell. However, as can be observed from FIG. 2, each dwell supports communications in either direction from a group of wireless modems – so while one wireless modem is receiving in a dwell, another wireless modem may be transmitting in the same dwell. In addition, each downlink transmission to a particular wireless modem in a particular dwell requires an uplink acknowledgement from that wireless modem in the next dwell. For example, if a packet is sent from AP<sub>1</sub> to wireless modem 310-1 in dwell 1 of FIG. 2, then AP<sub>1</sub> expects to receive an uplink acknowledgment from wireless modem 310-1 in dwell 2 of FIG. 2.

In order to support QoS (Quality of Service) differentiated services, each access point provides three priority classes of service. In each priority class, downlink traffic for a particular wireless modem is stored in a queue assigned to that wireless modem. The queues in a priority class are served by a round robin scheduler. The access point services queues in a strict priority sequence. The queues in a lower priority class are serviced only if no traffic from all higher priority classes can be sent either due to empty queues or due to the fact that the access point cannot schedule a transmit and receive in the same dwell.

An illustrative downlink scheduler 100 for use in an access point, e.g., AP<sub>1</sub>, is shown in FIG. 3. Other than the inventive concept, the elements shown in FIG. 3 are well known and will not be described in detail. For example, queues and schedulers, by themselves, are known in the art (e.g., see "A Self-Clocked Fair Queueing Scheme for Broadband Applications," J. Golestani, Proceeding of IEEE Infocom 1994, pp 5c.1.1-5c.1.11). Although shown as single block elements, the elements of downlink scheduler

100 includes stored-program-control processors, memory, and appropriate interface cards (all not shown). In addition, the inventive concept is implemented using conventional programming techniques, which as such, will not be described herein. Since call admission techniques are not necessary to the inventive concept, it is assumed that each user negotiates with a call admission process (not shown) to establish a call with one of the above-mentioned classes of service for downstream traffic.

Downlink scheduler 100 comprises scheduler 120 and 3 sets of class queues: class 1 queues 105, class 2 queues 110 and class 3 queues 115. Class 1 is the highest priority class, while class 3 is the lowest priority class. (It should be noted that scheduler 120 may also include a packet shaper, i.e., perform other packet shaping functions as known in the art, which are not relevant to the inventive concept.) Each set of class queues includes individual queues for each wireless modem, e.g., class 1 queues 105 comprises individual queues C1 310-1 through C1 310-N, associated with wireless modems 310-1 through 310-N, respectively. Downstream packet traffic is applied to the respective class queue via line 101 (which is assumed to also represent a packet classifier (not shown) for directing each packet received by downlink scheduler 100 to the appropriate class queues for the respective modem). For every dwell, or scheduling interval, scheduler 120 performs downlink scheduling as follows. Scheduler 120 temporarily stores in a memory (not shown) the last individual queue that was served during the last dwell and begins with the individual queue next to it. For example, if the last individual queue served in the last dwell was C1 310-1 of class 1 queues 105, then scheduler 120 starts this scheduling interval with individual queue C1 310-2 of class 1 queues 105 (via line 121). Continuing with this example, before removing packets from individual queue C1 310-2, scheduler 120 checks if any packet(s) were sent during the previous dwell to wireless modem 310-2. (It is assumed that such transmission information is stored in a table (not shown).) If there was at least one packet transmitted to wireless modem 310-2 during the previous dwell, scheduler 120 does not operate on this queue since an uplink acknowledgment must be received from wireless modem 310-2 for the previously transmitted packet(s). Conversely, if no packet was sent to wireless modem 310-2, scheduler 120 tries to schedule all the packets (if any) from individual queue C1 310-2 for transmission to

wireless modem 310-2 before moving to the next eligible queue. Scheduler 120 moves to class 2 queues 110 (via line 122) only after exhaustively serving all eligible individual queues of class 1 queues 105. Similarly, scheduler 120 only serves class 3 queues 115 (via line 123) after exhaustively serving all eligible queues in class 2 queues 105. After serving class 3 queues 115, scheduler 120 repeats the process (time permitting in the current scheduling interval). (Obviously, the dwell period, or scheduling interval, may expire before scheduler 120 completes servicing all of the class queues. Regardless, scheduler 120 simply picks up where it left off, as noted earlier.)

Absent the inventive concept, we have observed the following phenomena, which is conceptually illustrated in FIG. 4. First, the following assumptions are made. All wireless modems associated with AP<sub>1</sub> have similar traffic. In particular, class 1 sources are all synchronized and send one small packet to AP<sub>1</sub> every 40ms (i.e. every 2 dwells) for each active wireless modem served by AP<sub>1</sub> (in this example assumed to be wireless modems 310-1 through 310-N). Further, all class 2 traffic is FTP (file transfer protocol) type with large packets. Finally, at the beginning of a dwell, e.g., dwell 1, assume that all the individual queues of class 1 queues 105 have a packet waiting (and that scheduler 105 starts the scheduling interval with individual queue C1 310-1). Assuming the class 1 packets are small enough, scheduler 120 sends all of the class 1 packets downlink to each of the wireless modems in dwell 1. In the remaining bandwidth of dwell 1, scheduler 120 serves as much class 2 traffic as possible, here represented by at least one class 2 packet destined for wireless modem 310-1. It should be noted that at least one packet was transmitted to each wireless modem in dwell 1. Hence, dwell 2 is only used for uplink acknowledgements and no downlink traffic is sent. As such, in dwell 2 bandwidth is idle, i.e., wasted. When dwell 3 starts, the same situation is repeated – downlink transmission in dwell 3, uplink acknowledgements in dwell 4 (not shown). If this situation continues, any bandwidth available in an even dwell for downlink traffic is wasted, and poor throughput for class 2 traffic is noted (since, as illustrated in FIG. 4, only wireless modem 310-1 is receiving any class 2 traffic and class 2 packets, e.g., for wireless modem 310-2, are still waiting for transmission). In other words, downlink transmissions may become locked into every other dwell (even or odd) – thus potentially wasting half of the downlink

bandwidth (which was already half of the available airlink bandwidth due to the half duplex operation of the wireless modems).

Thus, we have observed that the combination of priority scheduling and the fact that a wireless modem cannot be scheduled to send and receive in the same dwell can lead to a situation where most of the wireless modems can only be sent downlink packets in, e.g., odd dwells (or, conversely, in even dwells). Therefore, and in accordance with the principles of the invention, load balancing is performed on the downlink channel by scheduler 120. In particular, a load balancing algorithm (described below) equalizes the load across dwells and thus improves bandwidth utilization.

Turning to FIG. 5, an illustrative flow chart is shown embodying the principles of the invention. In step 505, scheduler 120 monitors traffic, i.e., downlink transmissions, sent in the odd and even dwells. In step 510, scheduler 120 checks if there is an imbalance in the downlink traffic as between the odd and even dwells. If no imbalance is detected, scheduler 120 returns to step 505. However, if an imbalance is detected, in step 515 scheduler 120 redistributes at least some of the downlink wireless modem traffic to different dwells in an attempt to equalize the downlink traffic assignments across dwells and returns to step 505.

An illustrative implementation for use in scheduler 120 for adjusting downlink traffic between odd and even dwells is presented below in pseudo-code form. The following variables and data structures are defined:

$f$  – a variable, the value of which represents an imbalance measure between odd and even dwells;

$f_e$  – a variable, the value of which represents an imbalance measure for even dwells;

$f_o$  – a variable, the value of which represents an imbalance measure for odd dwells;

$f_w[i]$  – a variable, the value of which represents an imbalance measure for each wireless modem,  $WM_i$ ;

$M$  – the number of dwells measured;

$y1[i]$  – is the number of bytes sent in  $M$  odd dwells to wireless modem



$WM_i$ ;

$y2[i]$  – is the number of bytes sent in  $M$  even dwells to wireless modem

$WM_i$ ;

$x1$  – is the sum of all  $y1[i]$ , i.e.,  $x1 = \sum y1[i]$ ;

5  $x2$  – is the sum of all  $y2[i]$ , i.e.,  $x2 = \sum y2[i]$ ;

$a1$  – an intermediate parameter, calculated as shown below;

$c$  – an intermediate parameter, calculated as shown below;

$h$  – represents an averaging parameter, where  $h < 1$  and, illustratively,  $h = .8$ ; and

10  $threshold$  – represents an illustrative threshold value for adjusting the dwells and illustratively,  $threshold = 0.3$ .

An illustrative implementation of the method shown in FIG. 5 is as follows. First, perform the following initializations:

- Initialize the imbalance measure  $f = 0$ ;
- 15 - For each wireless modem,  $WM_i$ , set  $f\_w[i] = 0$ ; and
- Set  $M = 5$ .

Then, scheduler 120 performs the following initial calculations:

- Determine  $x1$ , by counting the total number of bytes sent over  $M$  odd dwells to all wireless modems (i.e., over all  $i$  for  $WM_i$ );
- 20 - For each wireless modem,  $WM_i$ ,  $i=1, \dots, N$ , determine  $y1[i]$  by counting the number of bytes sent over  $M$  odd dwells to each wireless modem;
- Determine  $x2$ , by counting the total number of bytes sent over  $M$  even dwells to all wireless modems (i.e., over all  $i$  for  $WM_i$ ); and
- For each wireless modem,  $WM_i$ ,  $i=1, \dots, N$ , determine  $y2[i]$  by counting the
- 25 number of bytes sent over  $M$  even dwells to each wireless modem.

Every  $2M$  dwells scheduler 120 performs the following calculations:

- $f\_e = (1 - h) * f\_e + h * [(x2)/(x1 + x2)]$ ;
- $f\_o = (1 - h) * f\_o + h * [(x1)/(x1 + x2)]$ ;
- $f = f\_o - f_e$ ;
- 30 for each  $WM_i$  (for  $i = 1, \dots, N$ ) do the following:

```

-  $f\_w[i] = (1 - h) * f\_w[i] + h * [(y1[i] - y2[i]) / (x1 + x2)];$ 
- If( $abs(f) > Threshold$ )
    { $a1 = 0;$ 
     $c = abs(f)/2;$ 
5    If( $f > 0$ )
        {Sort the WMs in increasing order of  $f\_w[i]$  //Reindex WMs;
        for  $i = 1, \dots, N$ 
            {if( $f\_w[i] > 0$ )
                {if( $f\_w[i] + a1 < c$ )
10                    {Move  $WM_i$  to even dwells;          (1)
                     $a1 = a1 + f\_w[i];$ 
                    }
                }
            }
        }
15    else
        {Sort the WMs in increasing order of  $-f\_w[i]$  //Reindex WMs;
        for  $i = 1, \dots, N$ 
            {if( $f\_w[i] < 0$ )
                {if( $-f\_w[i] + a1 < c$ )
20                    {Move  $WM_i$  to odd dwells;          (2)
                     $a1 = a1 - f\_w[i];$ 
                    }
                }
            }
25        }
    }
     $f\_e = 0; f\_o = 0; f\_w[i] = 0$  for  $i = 1, \dots, N$ 
    }

```

As a result of the above, should scheduler 120 detect a load imbalance across even

30 and odd dwells, scheduler 120 shifts the traffic for particular wireless modems to the other

type of dwell (e.g., see steps (1) and (2), above), thus reducing the imbalance.

Turning briefly to FIG. 6, a high-level block diagram of a representative access point comprising a downlink scheduler for use in accordance with the principles of the invention is shown. Access point 605 is a stored-program-control based processor architecture and includes processor 650, memory 660 (for storing program instructions and data, e.g., for performing the above-described method shown in FIG. 5, etc.) and communications interface(s) 665 for coupling to one or more packet communication paths as represented by path 666 (e.g., 665 represents a transmitter and a receiver).

(It should be noted that the downlink scheduler described above could alternatively be implemented at other points of portion 300 of FIG. 1. For example, the downlink scheduler could be a part of the wireless hub (WH) provided the WH has access to dwell assignment information for downstream packets along with suitable modifications to support a plurality of access points.)

The foregoing merely illustrates the principles of the invention and it will thus be appreciated that those skilled in the art will be able to devise numerous alternative arrangements which, although not explicitly described herein, embody the principles of the invention and are within its spirit and scope. For example, although illustrated in the context of a wireless system, the inventive concept is applicable to any system (e.g., wired, etc.) that addresses QoS.

WHAT IS CLAIMED:

1           1. A method for use in a transmitter, the method comprising the steps of:  
2           using a downlink channel to convey information to a group of devices; and  
3           load balancing the downlink channel.

1           2. The method of claim 1 wherein the downlink channel comprises a sequence of  
2 dwells, each dwell having a time period, and wherein the method further comprises the  
3 step of detecting that at least one dwell of the sequence conveys more downlink  
4 information than the other dwells of the sequence as a prerequisite to performing the load  
5 balancing step.

1           3. A method for use in a wireless system, the method comprising the steps of:  
2           sending data to a group of  $N$  wireless endpoints over a communications channel  
3 comprising a sequence of time slots;  
4           detecting an imbalance such that some of the time slots convey more data than  
5 other time slots; and  
6           shifting some of the data from at least one time slot to another time slot for  
7 reducing the detected imbalance.

1           4. The method of claim 3 wherein the detecting step includes the steps of:  
2           measuring the amount of data sent in each of  $M$  timeslots to the  $N$  wireless  
3 endpoints; and  
4           comparing the measured data for at-least-one of the  $M$  timeslots to others of the  $M$   
5 timeslots for detecting the imbalance.

1           5. A method for use in a wireless system, the method comprising the steps of:  
2           sending data to a group of  $N$  wireless endpoints over a communications channel  
3 comprising a sequence of time slots;  
4           detecting an imbalance such that every other time slot of the sequence conveys  
5 more data than the remaining time slots of the sequence; and  
6           shifting some of the data from at least one of the every other time slots to at least

7 one of the remaining time slots for reducing the detected imbalance.

1 6. Apparatus for use in a communications system, the apparatus comprising:  
 2 a transmitter for providing a downlink channel to convey information to a group of  
 3 devices; and  
 4 a processor for performing load balancing on the downlink channel.

1 7. The apparatus of claim 6 wherein the downlink channel comprises a number of  
 2 dwells, each dwell having a time period, and wherein the processor performs the load  
 3 balancing upon detection that at least one of the dwells conveys more downlink  
 4 information than the other dwells.

1 8. Apparatus for use in a wireless system, the apparatus comprising:  
 2 a memory for storing data for transmission to a group of  $N$  wireless endpoints;  
 3 a scheduler for retrieving the stored data and for measuring the amount of stored  
 4 data transmitted in each of  $M$  timeslots to the  $N$  wireless endpoints, and for comparing the  
 5 measured data for at-least-one of the  $M$  timeslots to others of the  $M$  timeslots for  
 6 detecting an imbalance in the transmission and for shifting some of the data from at least  
 7 one time slot to another time slot for reducing the detected imbalance.

1 9. Apparatus for use in a wireless system, the apparatus comprising:  
 2 a memory for storing data for transmission to a group of  $N$  wireless endpoints;  
 3 a scheduler for retrieving the stored data and for measuring the amount of stored  
 4 data transmitted in each of  $M$  timeslots to the  $N$  wireless endpoints, and for detecting an  
 5 imbalance such that every other time slot of the  $M$  time slots convey more data than the  
 6 remaining time slots of the  $M$  time slots; and for shifting some of the data from at least one  
 7 of the every other time slots to at least one of the remaining time slots for reducing the  
 8 detected imbalance.

## ABSTRACT

In a wireless internet access system, an access point of a base station and a group of wireless modems communicate over a wireless channel. This wireless channel comprises a sequence of “dwells,” where each dwell represents a period of time, e.g., 20 milli-seconds (ms). Each dwell can convey both uplink (or upstream) and downlink (or downstream) transmissions to, and from, the group of wireless modems. However, in each dwell a particular wireless modem can only communicate half-duplex – either provide an uplink transmission to the access point, or receive a downlink transmission from the access point. The access point load balances, or distributes, the downlink transmissions to the group of wireless modems across the dwells upon detection that some dwells convey more downlink transmissions than other dwells.

FIG. 1




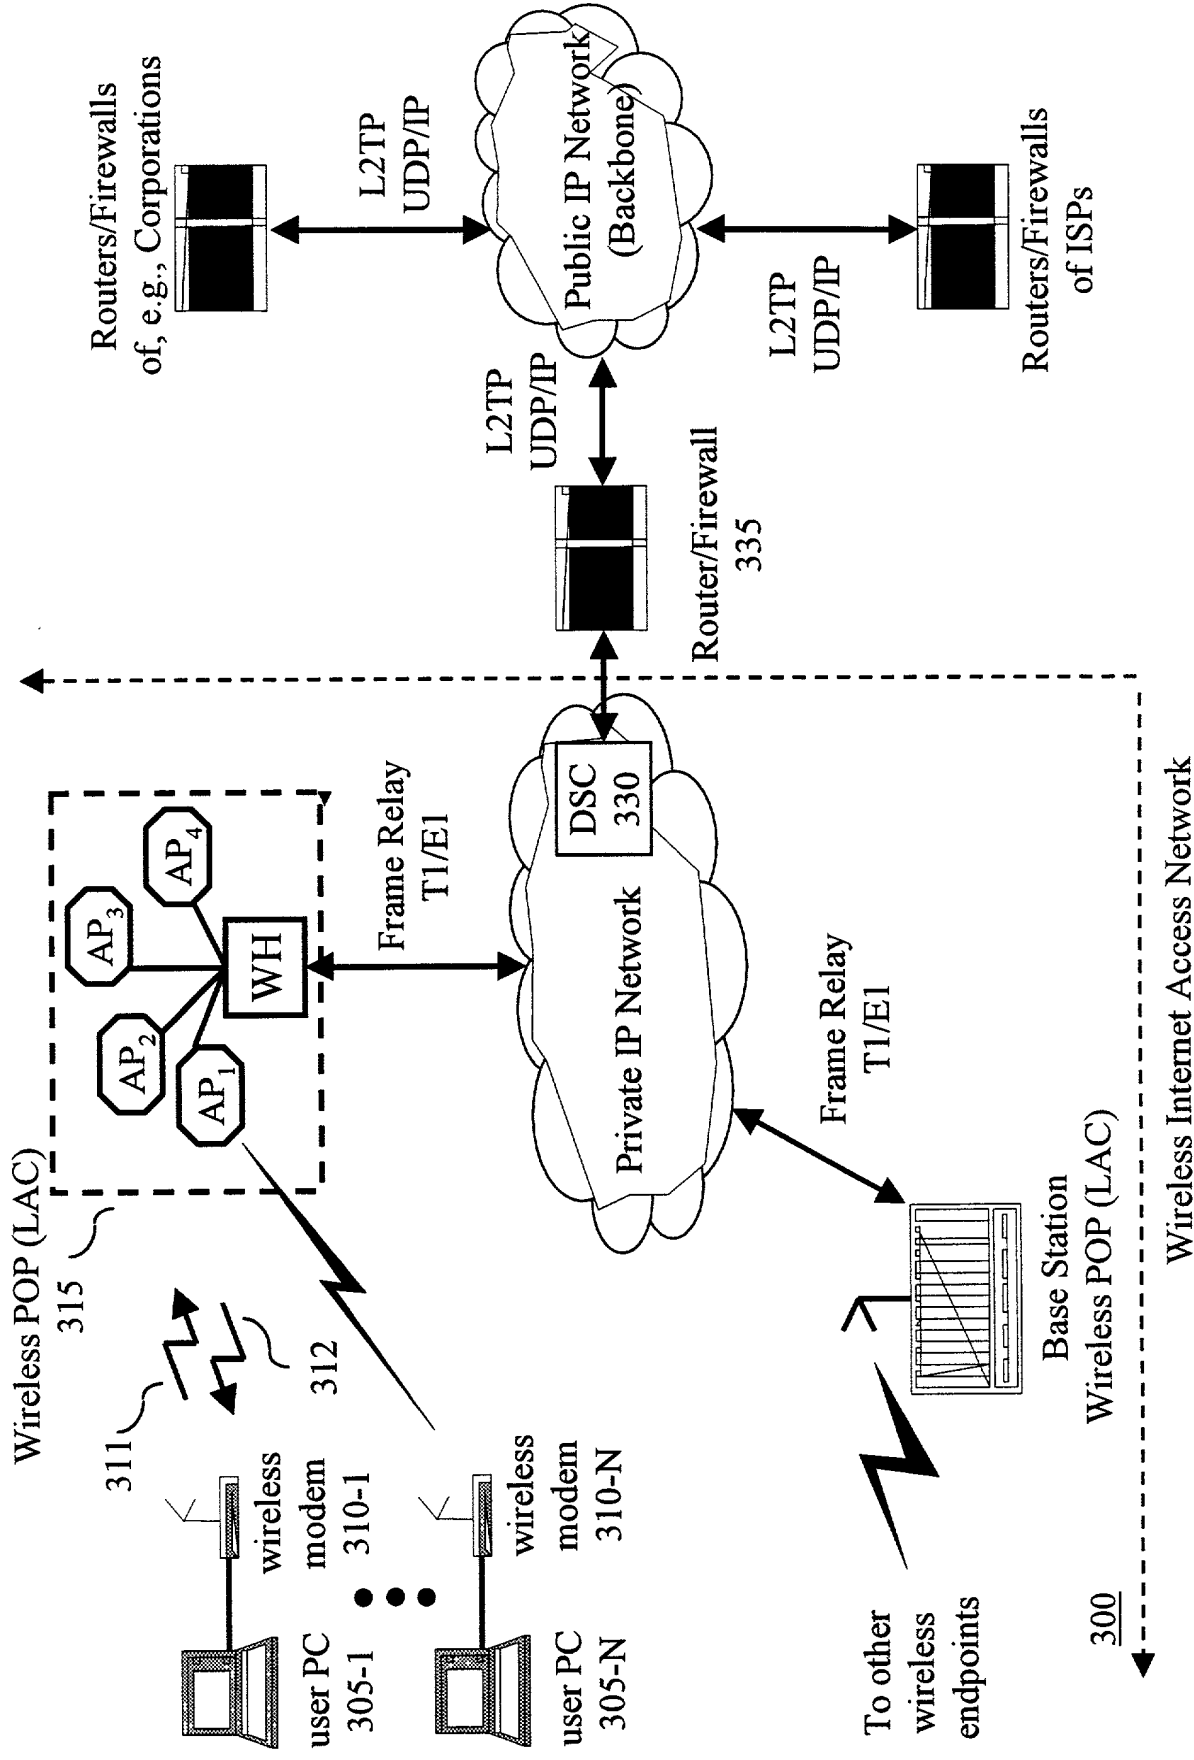



FIG. 2




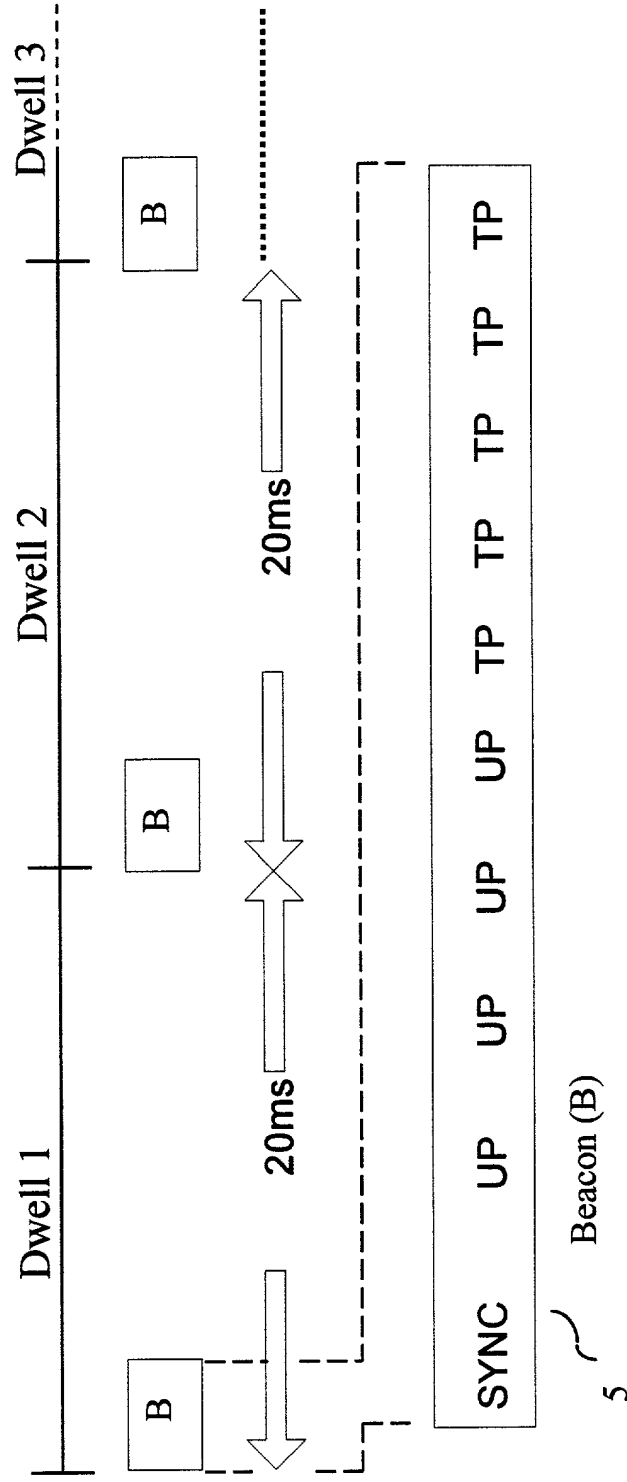

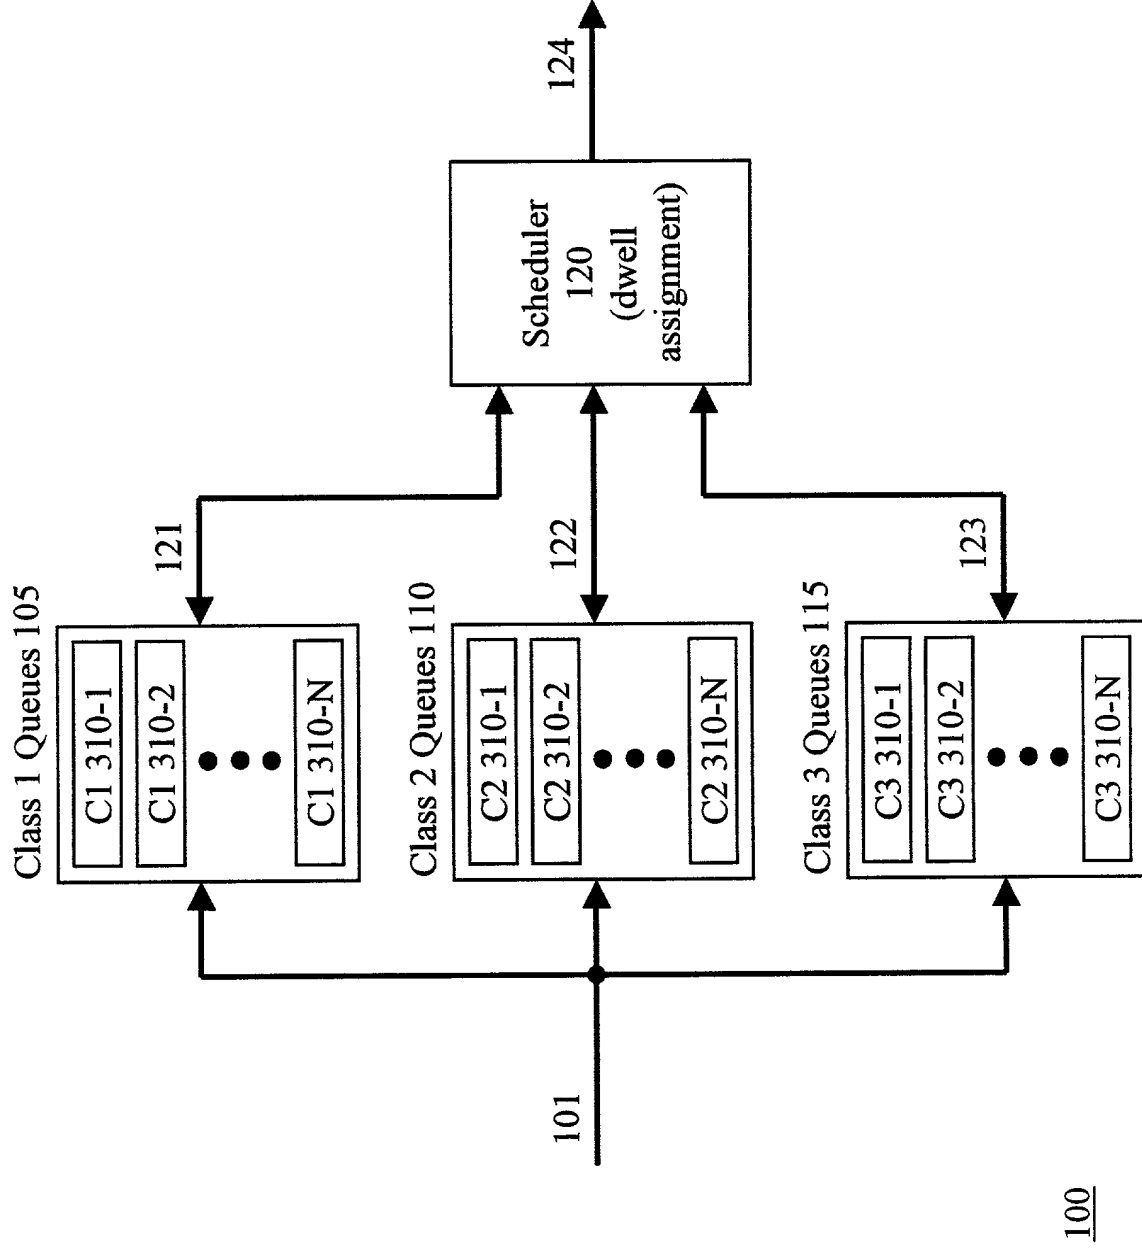

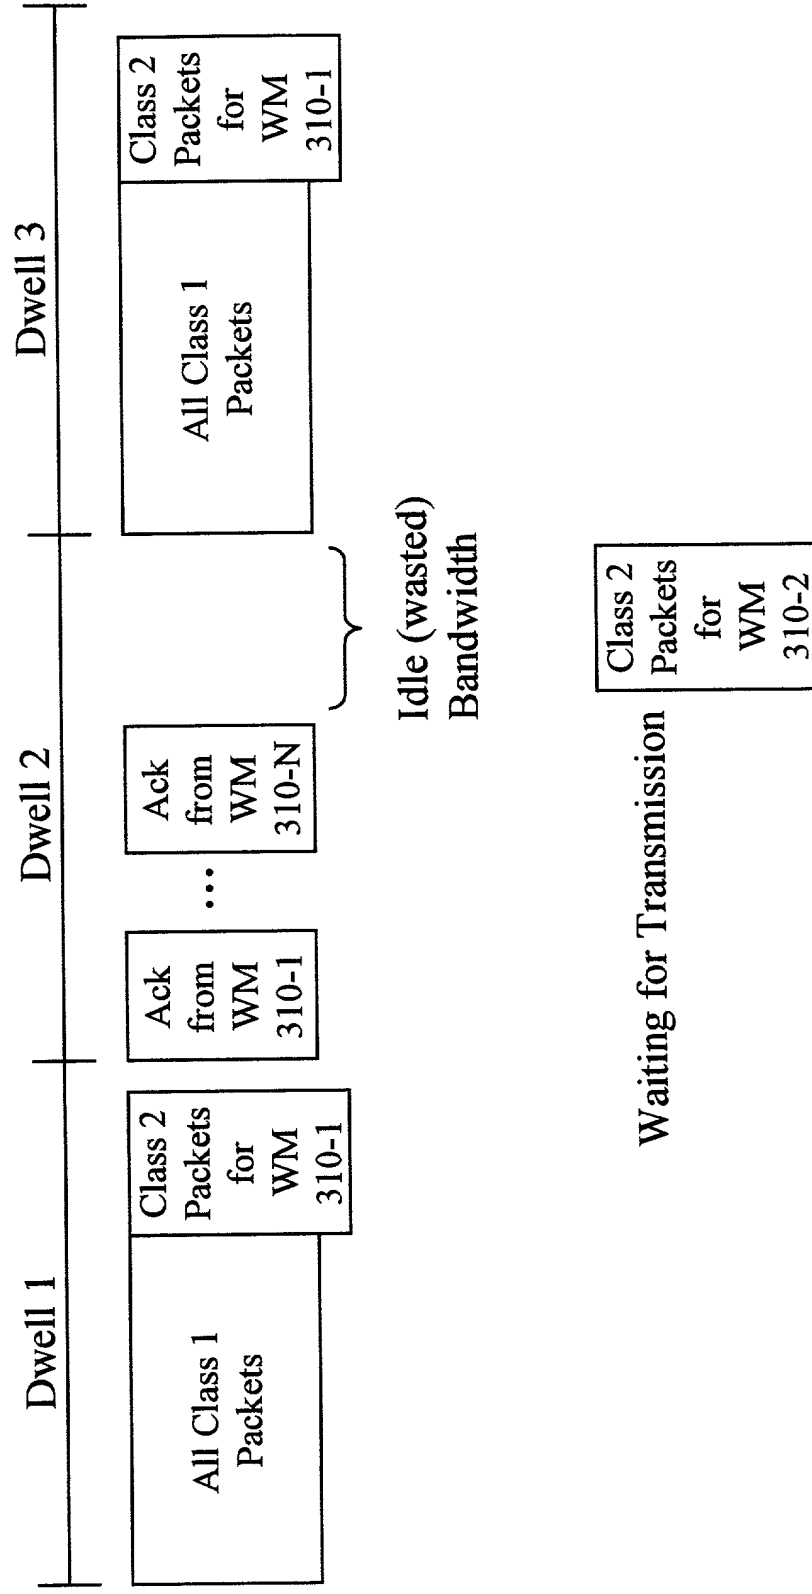

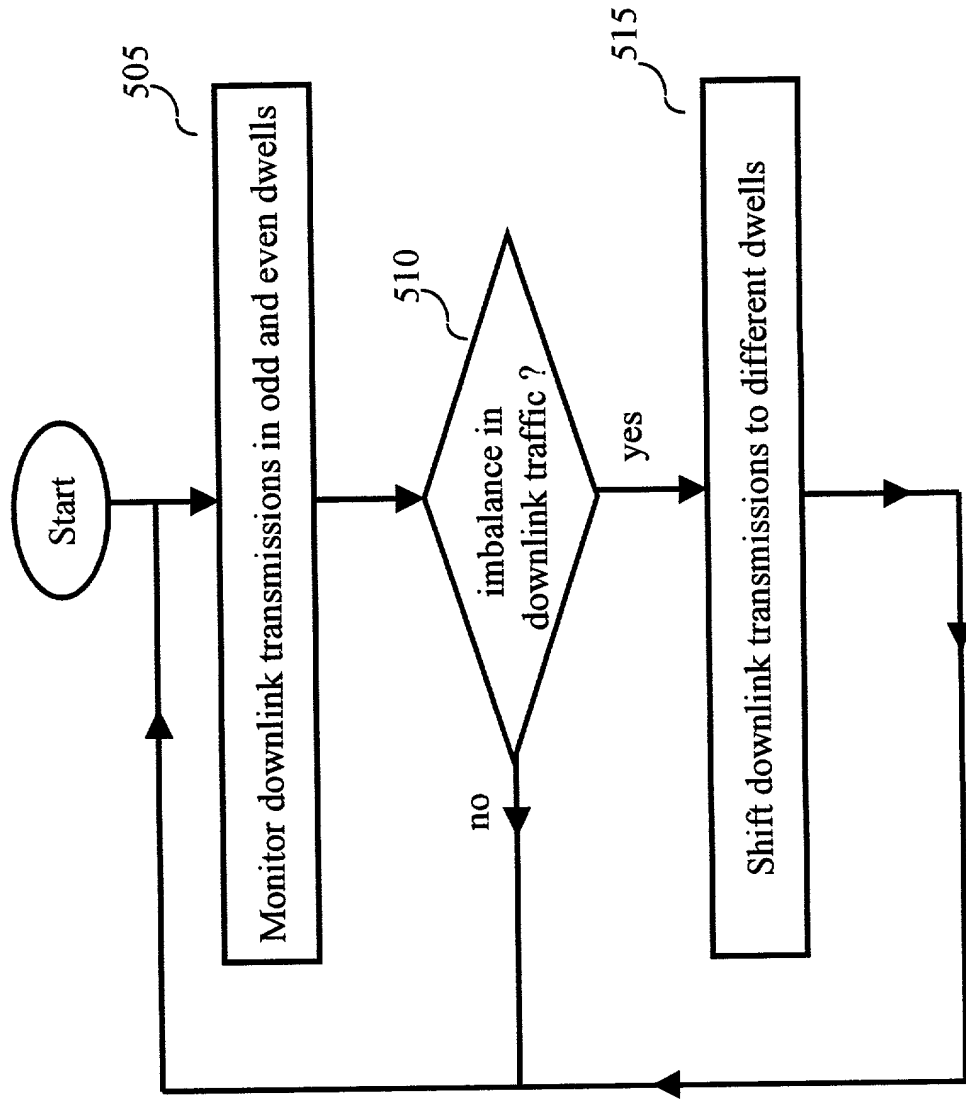

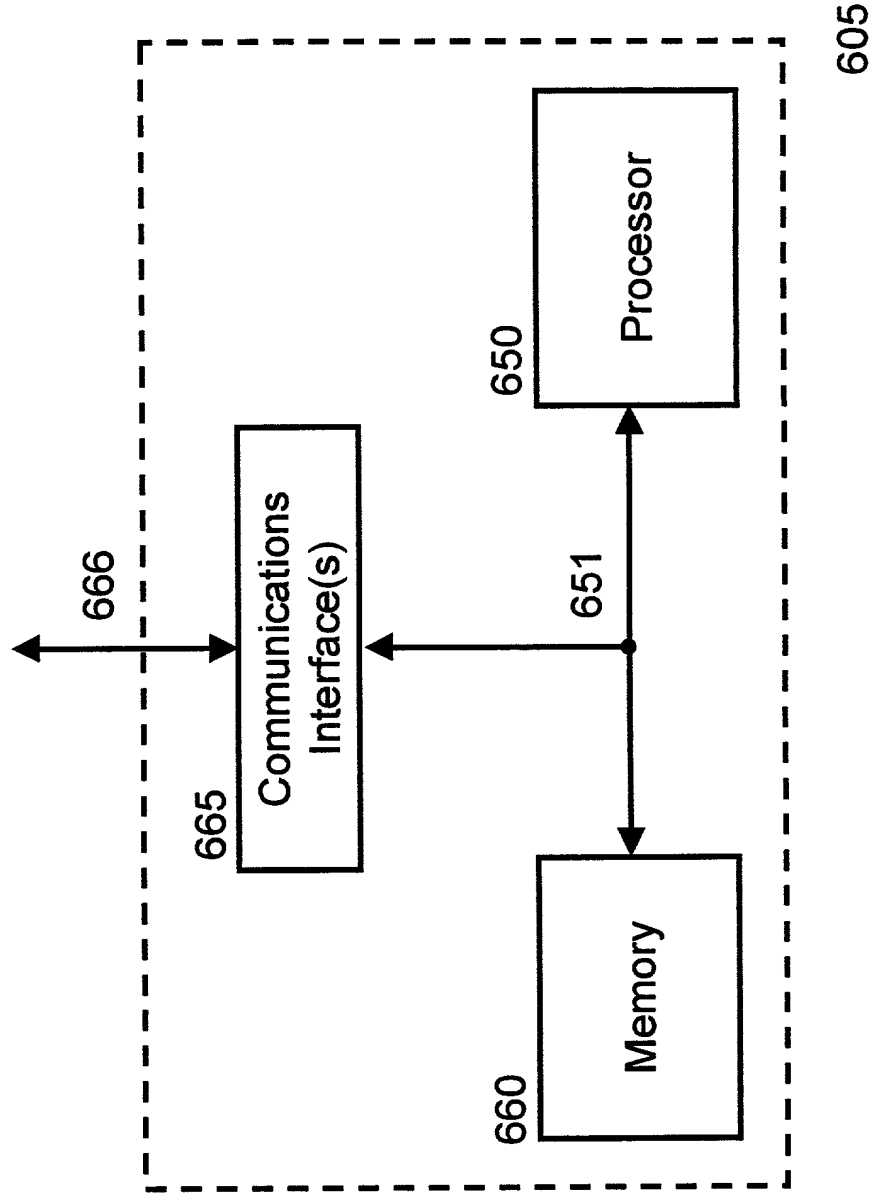

IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I hereby claim the benefit under Title 35, United States Code, 119(e) of any United States provisional application(s) identified below:

Provisional application No. 60/198389, filed on April 19, 2000.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **A Load Balancing Technique for a Wireless Internet Access System** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

|                        |                  |
|------------------------|------------------|
| Thomas J. Bean         | (Reg. No. 44528) |
| Lester H. Birnbaum     | (Reg. No. 25830) |
| Richard J. Botos       | (Reg. No. 32016) |
| Jeffery J. Brosemer    | (Reg. No. 36096) |
| Kenneth M. Brown       | (Reg. No. 37590) |
| Donald P. Dinella      | (Reg. No. 39961) |
| Martin I. Finston      | (Reg. No. 31613) |
| William S. Francos     | (Reg. No. 38456) |
| Barry H. Freedman      | (Reg. No. 26166) |
| Julio A. Garceran      | (Reg. No. 37138) |
| Jimmy Goo              | (Reg. No. 36528) |
| Anthony Grillo         | (Reg. No. 36535) |
| Stephen M. Gurey       | (Reg. No. 27336) |
| John M. Harman         | (Reg. No. 38173) |
| Matthew J. Hodulik     | (Reg. No. 36164) |
| Michael B. Johannesen  | (Reg. No. 35557) |
| Mark A. Kurisko        | (Reg. No. 38944) |
| Irena Lager            | (Reg. No. 39260) |
| John B. MacIntyre      | (Reg. No. 41170) |
| Christopher N. Malvone | (Reg. No. 34866) |
| John F. McCabe         | (Reg. No. 42854) |
| Scott W. McLellan      | (Reg. No. 30776) |
| Martin G. Meder        | (Reg. No. 34674) |
| John C. Moran          | (Reg. No. 30782) |
| Michael A. Morra       | (Reg. No. 28975) |
| Gregory J. Murgia      | (Reg. No. 41209) |
| Claude R. Narcisse     | (Reg. No. 38979) |
| Joseph J. Opalach      | (Reg. No. 36229) |
| Neil R. Ormos          | (Reg. No. 35309) |
| Eugen E. Pacher        | (Reg. No. 29964) |
| Jack R. Penrod         | (Reg. No. 31864) |
| Gregory C. Ranieri     | (Reg. No. 29695) |
| Scott J. Rittman       | (Reg. No. 39010) |
| Ferdinand M. Romano    | (Reg. No. 32752) |
| Eugene J. Rosenthal    | (Reg. No. 36658) |
| Bruce S. Schneider     | (Reg. No. 27949) |
| Ronald D. Slusky       | (Reg. No. 26585) |
| David L. Smith         | (Reg. No. 30592) |
| Ozer M. N. Teitelbaum  | (Reg. No. 36698) |
| John P. Veschi         | (Reg. No. 39058) |
| David Volejnicek       | (Reg. No. 29355) |
| Charles L. Warren      | (Reg. No. 27407) |
| Jeffrey M. Weinick     | (Reg. No. 36304) |
| Eli Weiss              | (Reg. No. 17765) |

Please address all correspondence to the Docket Administrator (Rm. 3C-512), Lucent Technologies Inc., 600 Mountain Avenue, P. O. Box 636, Murray Hill, New Jersey 07974-0636. Telephone calls should be made to Joseph J Opalach by dialing 732-949-1708.

Full name of 1st joint inventor: Santosh P Abraham

Inventor's signature



Date

8/22/00


Residence: Keasbey, Middlesex County, New Jersey

Citizenship: Indian

Post Office Address: 208 Sunnyview Oval  
Keasbey, New Jersey, 08832

Full name of 2<sup>nd</sup> inventor: Mooi Choo Chuah

Inventor's signature



Date

8/28/00

Residence: Marlboro, Monmouth County, New Jersey

Citizenship: Malaysia

Post Office Address: 1 Skylark Ct.  
Marlboro, New Jersey, 07746